

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 870 875 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.10.1998 Bulletin 1998/42

(51) Int. Cl.⁶: E02D 3/10

(21) Application number: 98103845.8

(22) Date of filing: 04.03.1998

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 10.04.1997 SG 9701114

(71) Applicant:
RASWILL REPRESENTATIVE PTE. LTD
Singapore 1129 (SG)


(72) Inventor:
Sandanasamy, Richard Douglas
12-61 Singapore 2057 (SG)

(74) Representative:
Meddle, Alan Leonard et al
FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38
80801 München (DE)

(54) A vertical drain

(57) A vertical drain (1) for draining fluid from ground soil, which drain comprises an elongate core (2) having one or more channels (5) extending along the length of the core (2) to receive fluid; electrically conductive means (4) extending substantially along the

length of the core (2); and a filter (3) surrounding the core (2), wherein fluid from ground being consolidated passes through the filter (3) into the one or more channels (5) in the core (2).



EP 0 870 875 A2

Description

THIS INVENTION relates to a vertical drain and more particularly to a vertical drain for use in consolidating weak or soft soils.

Before infrastructure or buildings can be developed in an area, it is necessary that the ground upon which the development is to take place is adequately consolidated in order to take the load of the infrastructure or building. This is especially true where construction is to take place on reclaimed land. Large amounts of clay, silty clay and marine clay are to be found in many areas inland and onshore where land is to be reclaimed. These weak soils have a high water content which must be reduced so that the ground can consolidate before construction can take place.

Early methods of ground consolidation involve the use of sand drains. These are vertical bores filled with sand which extend down into the ground to be consolidated. A surcharge load such as a large volume of sand is deposited over the bores on the ground to be consolidated. The pressure exerted by the sand on the ground forces water in the weak soils into and up the sand drains thereby consolidating the ground. Such an arrangement is shown in Figure 1 of the accompanying drawings.

Without the use of sand drains, a surcharge load placed on the surface to compress and thereby consolidate the weak soil below will take several years to settle completely or achieve a desired level of consolidation, i.e. 90 to 95%, to render the land suitable for construction. However, by using sand drains, this period is reduced to only a few months depending upon the soil condition, the spacing of the drains and the weight of the surcharge load.

Sand drains have been replaced with so-called pre-fabricated vertical drains (PVD). PVD's comprise an elongate plastics corrugated core surrounded by a filter cloth. Water is free to pass through the filter cloth into the corrugations of the plastic core. The corrugations define a series of elongate channels in the core. The water in the vertical drain is thereby forced up through the channels to the surface by the pressure of the surcharge load placed on the ground being consolidated or can be drawn up the vertical drain by use of a vacuum suction system. An example of a PVD is shown in Figure 2A of the accompanying drawings.

A mesh like structure can be used instead of the corrugated core profile. A prefabricated vertical drain incorporating the mesh like structure is shown in Figure 2B of the accompanying drawings.

The rate of consolidation using prefabricated vertical drains after 60% consolidation has been achieved begins to slow. The waiting period necessary to achieve further consolidation is lengthy and, therefore, in most circumstances impractical. In order to speed up the consolidation process, it is known to increase the surcharge load on the ground being consolidated but there are

associated problems with this solution such as the instability of the surcharge load above the ground being consolidated, shortage of surcharge material and the extra time and cost needed to deposit the further surcharge.

This invention seeks to provide an improved vertical drain which does not suffer from the above-mentioned problems and which allows the acceleration of the consolidation process.

Accordingly, one aspect of the present invention provides a vertical drain for draining fluid from ground soil, which drain comprises an elongate core having one or more channels extending along the length of the core to receive fluid; electrically conductive means extending substantially along the length of the core; and a filter surrounding the core, wherein fluid from ground being consolidated passes through the filter into the one or more channels in the core.

A further aspect of the present invention provides an array of vertical drains comprising: a plurality of vertical drains according to any preceding claim connectable to a negative terminal of a power source; and a plurality of electrically conductive means connectable to a positive terminal of a power source.

Another aspect of the present invention provides a method of consolidating ground soil by draining fluid from ground soil comprising the steps of: introducing an array of vertical drains having electrically conductive means therein into ground to be consolidated; providing a surcharge load on the ground to be consolidated to cause hydraulic consolidation of the ground, fluid being drained from the ground through the vertical drains; and connecting the electrically conductive means in the vertical drains to a power source to initiate electro-osmotic consolidation of the ground to be consolidated.

In order that the present invention may be more readily understood, embodiments thereof will now be described, by way of example, with reference to the accompanying drawings, in which:

FIG. 1 is a cross-section through a schematic representation of a conventional ground consolidation system using sand drains or pre-fabricated vertical drains;

FIG. 2A is a cross-section through a known pre-fabricated vertical drain;

FIG. 2B is a cross-section through another form of a pre-fabricated vertical drain;

FIG. 3 is a cross-section through a vertical drain embodying the present invention;

FIG. 4 is a cross-section through a schematic representation of ground being consolidated provided with vertical drains embodying the present invention;

FIG. 5 is a schematic plan view of a square grid of vertical drains embodying the present invention; and

FIG. 6 is a schematic plan view of a triangular grid of vertical drains embodying the present invention.

Referring to Figure 3, a vertical drain 1 embodying the present invention comprising a corrugated plastics core 2 which is surrounded by a synthetic filter cloth 3. In the example shown in Figure 3, the vertical drain has a thickness in the region of 3 mm, a nominal width of 100 mm and a length in the region of 50m or more. The drain is manufactured in coiled lengths of 200 m or more. Preferably, the plastics materials from which the plastics core is manufactured is polypropylene or polyethylene or other extrudable plastics. The synthetic filter cloth is preferably manufactured from polypropylene or polyethylene or other synthetic fibres and is sufficiently porous to allow water to permeate through the filter cloth into the corrugations 5 of the plastics core. Preferably, the average pore size of the synthetic filter cloth is in the region of 75 to 200 microns.

The corrugations 5 in the plastics core define a series of channels extending along the vertical drain, which channels are open to the synthetic filter cloth surrounding the core such that water permeating through the filter cloth is received in the one or more channels.

Conveniently, the corrugated plastics core 2 is manufactured by extrusion. Either after extrusion or during the extrusion process, one or more electrically conductive strips 4 such as, for example, copper wire are attached or embedded along the length of the plastics core 2. The electrically conductive strips 4 run continuously from one end of the vertical drain along the length of the plastics core 2 to the other end of the vertical drain.

A vertical drain embodying the present invention may dispense with the electrically conductive strips 4 by utilising a plastics core 2 manufactured from an electrically conductive resin. Either all the plastics core 2 or selected areas of the plastics core are manufactured from the electrically conductive resin. Examples of appropriate electrically conductive resins are polypropylene and polyethylene base resins which are compounded with carbon to produce electrically conductive polypropylene and electrically conductive polyethylene. Such resins are readily available in extrusion grade.

In use, vertical drains embodying the present invention are inserted in a square grid of bores in the area of ground to be consolidated. The grid of the drains defines an array of rows and columns of drains which are spaced apart by between 1.0 m to 1.5 m. This arrangement is shown schematically in Figures 4 and 5. A DC power source such as high capacity wet cells, an on-site generator or a connection to a grid supply is connected to the vertical drains by means of connector terminals which are exposed above the surface of the

ground to be consolidated. In the array of vertical drains, alternate rows of vertical drains are connected to either a negative or positive terminal of the power supply such that a first row of vertical drains comprises a row of anodes, a second row of vertical drains comprises a row of cathodes and so on.

A surcharge load is placed over the area of ground to be consolidated. The provision of the surcharge load begins a process of hydraulic consolidation of the ground beneath the surcharge load. As the ground consolidates, the water content of the ground reduces as water passes through the synthetic filter cloths 3 of the vertical drains 1 into the corrugations 5 of the plastics core 2 and up and out of the vertical drains 1. As previously discussed, after about 60% consolidation has taken place, the rate of hydraulic consolidation begins to slow considerably. However, using the vertical drains embodying the present invention, the rate of consolidation can be re-accelerated by implementing an electro-osmotic consolidation of the ground through which the vertical drains 1 pass. The DC supply to the array of vertical drains 1 is switched on thereby beginning the electro-osmotic consolidation process. The electro-osmotic consolidation process results in water being attracted to the cathode vertical drains 1.

It should be appreciated that whilst the electro-osmotic consolidation is taking place, there is still a certain amount of hydraulic consolidation taking place. Since the construction of the vertical drains 1 for use as both cathodes and anodes is identical, the hydraulic consolidation will still cause a certain amount of water to be present in the anode vertical drains. The water present in the anode vertical drains is being attracted to the cathode vertical drains through the ground being consolidated. Thus, a certain amount of electrical energy could be considered to be being wasted. Therefore, in one consolidation system embodying the present invention, the cathode vertical drains are produced as previously described whereas the anodes in the array of vertical drains comprise solid cores without corrugations to prevent water being collected in the anodes.

Whilst the array of vertical drains has been described as a square array, other array patterns are possible using, for example, the triangular grid pattern shown in Figure 6.

The features disclosed in the foregoing description, in the following claims and/or in the accompanying drawings may, both separately and in any combination thereof, be material for realising the invention in diverse forms thereof.

Claims

1. A vertical drain for draining fluid from ground soil, which drain comprises an elongate core having one or more channels extending along the length of the core to receive fluid; electrically conductive means

extending substantially along the length of the core;
and a filter surrounding the core, wherein fluid from
ground being consolidated passes through the filter
into the one or more channels in the core.

2. A vertical drain according to Claim 1, wherein the
electrically conductive means comprises a portion
of the core which is electrically conductive. 5
3. A vertical drain according to Claim 1 or 2, wherein
the core is manufactured from a resin. 10
4. A vertical drain according to Claim 3, wherein the
resin is electrically conductive. 15
5. A vertical drain according to Claim 1, wherein the
electrically conductive means comprises an electri-
cally conductive strip. 20
6. A vertical drain according to Claim 5, wherein the
strip is located in a channel of the core. 25
7. A vertical drain according to Claim 5, wherein the
strip is attached to or embedded in the core. 30
8. A vertical drain according to any one of Claims 5 to
7, wherein the strip comprises a copper wire. 35
9. A vertical drain according to any preceding claim,
wherein the core is an extrusion. 40
10. A vertical drain according to any preceding claim,
wherein the electrically conductive means is part of
the core extrusion. 45
11. An array of vertical drains comprising: a plurality of
vertical drains according to any preceding claim
connectable to a negative terminal of a power
source; and a plurality of electrically conductive
means connectable to a positive terminal of a
power source. 50
12. An array according to Claim 11, wherein the electri-
cally conductive means connectable to the positive
terminal of the power source do not include any
channels to receive fluid from the ground soil. 55
13. An array according to Claim 11, wherein the electri-
cally conductive means connectable to the positive
terminal of the power source comprise the electri-
cally conductive means of further vertical drains
according to any one of Claims 1 to 10.
14. A method of consolidating ground soil by draining
fluid from ground soil comprising the steps of: intro-
ducing an array of vertical drains having electrically
conductive means therein into ground to be consol-
idated; providing a surcharge load on the ground to

be consolidated to cause hydraulic consolidation of
the ground, fluid being drained from the ground
through the vertical drains; and connecting the
electrically conductive means in the vertical drains
to a power source to initiate electro-osmotic consol-
idation of the ground to be consolidated.

15. A vertical drain substantially as hereinbefore
described with reference to and as shown in Fig-
ures 3 to 6.
16. A method of consolidating ground soil substantially
as hereinbefore described with reference to and as
shown in Figures 3 to 6.

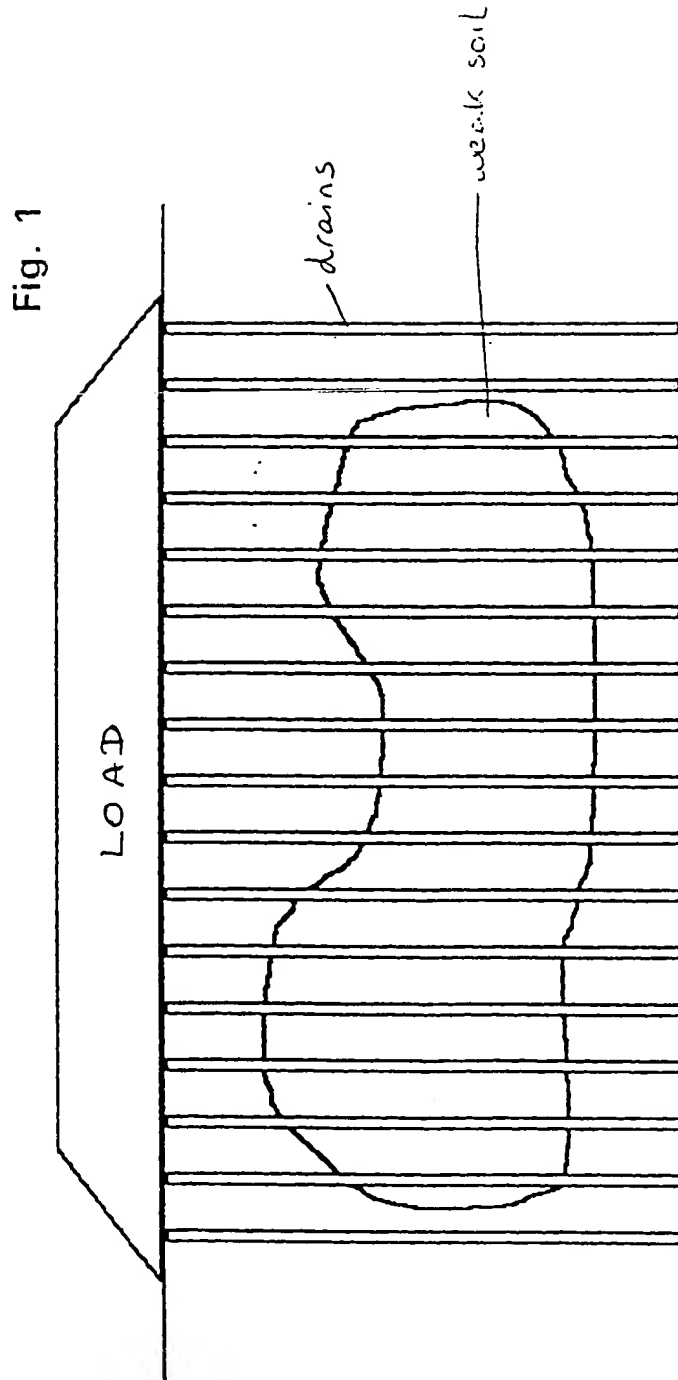


Fig. 2A

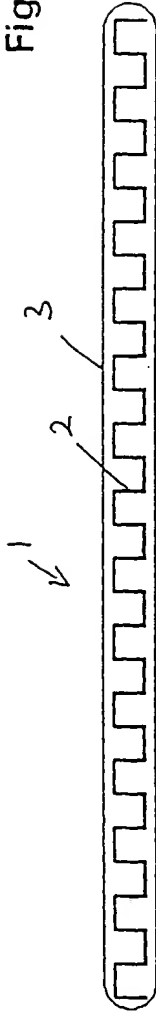
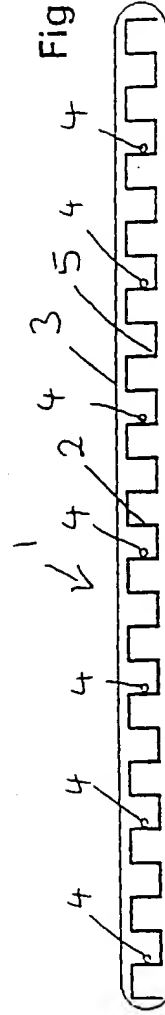
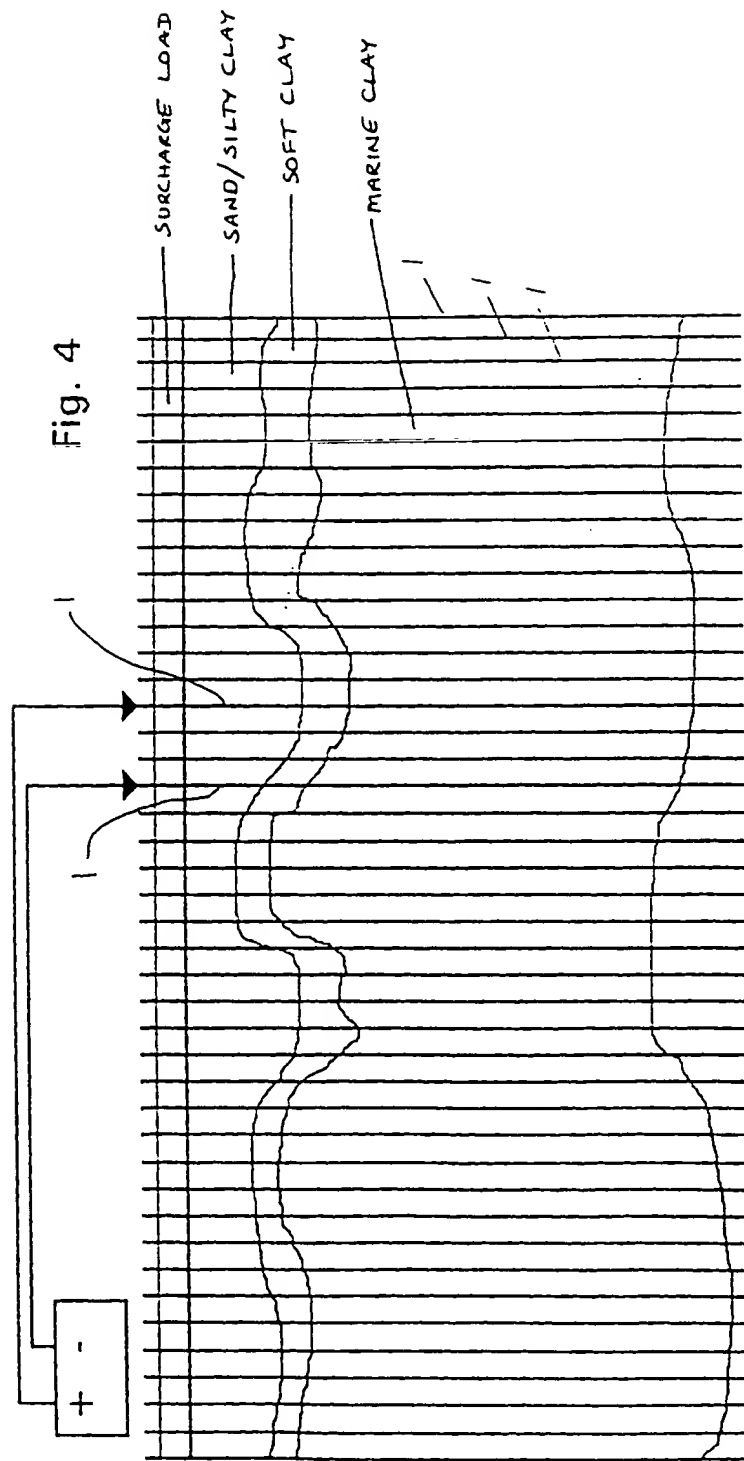


Fig. 2B:



Fig. 3





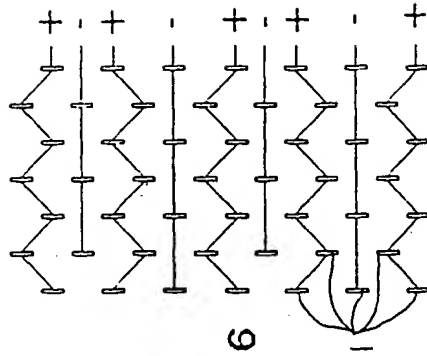


Fig. 6

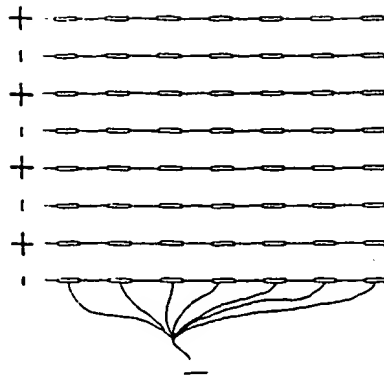


Fig. 5




European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 3845

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 04, 31 May 1995 (1995-05-31) & JP 07 018654 A (SHIMIZU CORP;OTHERS: 03), 20 January 1995 (1995-01-20)	1,5,7, 11,13	E02D3/10 E02D3/11
Y	* abstract *	2,3,7,9, 12,14	
A	---	8	
Y	EP 0 460 956 A (MITSUI PMITSUI PETROCHEMICAL) 11 December 1991 (1991-12-11) * column 1, line 1-41; figures 12-14 *	3,9,14	
Y	US 3 856 646 A (MORARAU) 24 December 1974 (1974-12-24)	2,7,12	
A	* column 3, line 11-55; figures 1-7 *	8	
A	DE 37 36 576 A (HILLEBERG) 11 May 1989 (1989-05-11) * column 3, line 60 - column 5, line 30; figures 1-3 *	2-7,9,10	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	EP 0 425 457 A (BIANCHI) 2 May 1991 (1991-05-02) * column 2, line 7-19 *	8	E02D E04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 November 1999	Examiner Kergueno, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			

EPO FORM 1503 01 82 (P04C01)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) **EP 0 870 875 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
29.12.1999 Bulletin 1999/52

(51) Int. Cl.⁶: **E02D 3/10, E02D 3/11**

(43) Date of publication A2:
14.10.1998 Bulletin 1998/42

(21) Application number: 98103845.8

(22) Date of filing: 04.03.1998

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor:
Sandanasamy, Richard Douglas
12-61 Singapore 2057 (SG)

(30) Priority: 10.04.1997 SG 9701114


(74) Representative:
Hoarton, Lloyd Douglas Charles et al
Forrester & Boehmert,
Franz-Joseph-Strasse 38
80801 München (DE)

(71) Applicant:
RASWILL REPRESENTATIVE PTE. LTD
Singapore 1129 (SG)

(54) **A vertical drain**

(57) A vertical drain (1) for draining fluid from ground soil, which drain comprises an elongate core (2) having one or more channels (5) extending along the length of the core (2) to receive fluid; electrically conductive means (4) extending substantially along the

length of the core (2); and a filter (3) surrounding the core (2), wherein fluid from ground being consolidated passes through the filter (3) into the one or more channels (5) in the core (2).



EP 0 870 875 A3

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 98 10 3845

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information

04-11-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 07018654 A	20-01-1995	NONE	
EP 0460956 56 A		NONE	
US 3856646 A	24-12-1974	BE 717040 A	02-12-1968
		DE 1759891 A	15-07-1971
		FR 1583464 A	31-10-1969
		NL 6810006 A	21-03-1969
DE 3736576 A	11-05-1989	AT 67261 T	15-09-1991
		DE 3864833 A	17-10-1991
		WO 8903918 A	05-05-1989
		EP 0386077 A	12-09-1990
EP 0425457 A	02-05-1991	IT 1237170 B	24-05-1993
		AT 87345 T	15-04-1993
		DE 69001170 T	30-09-1993
		US 5131203 A	21-07-1992

EPO FORM P459

For more details about this annex, see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)